

MAC12650 (12V65Ah)

MAC General Series Battery

MAC General Series VRLA batteries are designed with AGM (Absorbent Glass Mat) technology, High performance plates and electrolyte to give extra power output for common power backup system. MAC series Batteries are the general purpose batteries with 10 years floating design life at 25°C. Meet with IEC, BS, JIS and Eurobat standard

General Features

Safety Sealing
 Non-spillable construction
 High Reliability and Stability
 Sealed and Maintenance-free
 Safety and Quality certification
 Long Life and low self-discharge design

Application

- Emergency Power System
- Communication equipment
- Telecommunication systems
- Uninterruptible power supplies
- Electric bicycle and wheelchairs, etc.
- Power tools
- Alarm system
- Marine equipment
- Fire and Security System


Construction

- PositiveLead dioxide
- ElectrolyteSulfuric acid
- SeparatorFiber glass
- ContainerABS(UL94-HB), Flammability Resistance of UL94-V2 can be available upon request
- NegativeLead
- Safety ValveEPDR
- TerminalCopper



Specification


Battery Model	Nominal Voltage		12V	
	Rated capacity(10 Hour rate)		65Ah	
Dimensions	Length	Width	Height	Total Height
	350mm (13.78 inches)	166mm(6.54 inches)	179mm(7.05 inches)	188mm (7.40 inches)
Approx Weight	22.0kg (48.49 lbs) ±3%			
Capacity 25°C (77°F)	10 hour (6.5A,10.8V)	5 Hour (10.4A,10.5V)	3 Hour (16.3A,10.2V)	1 Hour (39A,9.6V)
	65Ah	52Ah	48.9Ah	39 Ah
Max.discharge current	650A(5Sec.)			
Internal Resistance	Full charged at 25 °C: Approx 5.5mΩ			
Capacity affected by Temp. (10 HR)	40°C (104 °F)	25°C (77°F)	0°C (32°F)	-15°C (5°F)
	102%	100%	85%	65%
Self Discharge at 25°C (77°F)	After 3 months storage		After 6 months storage	After 12 months storage
	91%		82%	64%
Charge method 25°C (77°F)	Cycle Use		Float Use	
	14.10-14.40V (Initial charging current less than 26A)		13.50-13.80V	

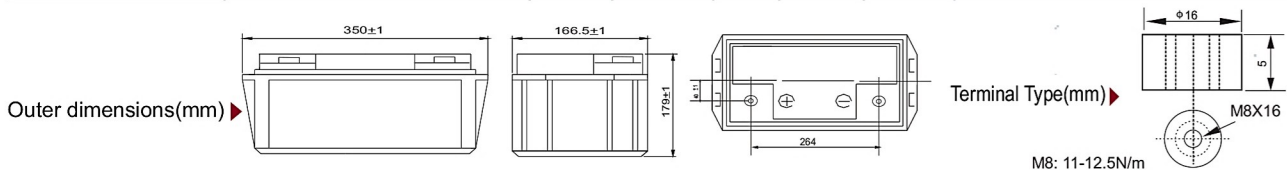


Constant Current(Amp) and Constant Power(Watt) Discharge Table at 25°C(77°F)

Time		5min	10min	15min	30min	1hr	2hr	3hr	4hr	5hr	8hr	10hr	20hr
9.60V	A	208.2	137.2	110.6	74.1	39.0	22.8	16.7	13.0	10.7	7.6	6.8	3.7
	W	2148.6	1464.8	1185.5	796.7	421.2	249.8	185.9	146.3	121.9	87.2	78.8	42.9
10.20V	A	201.6	123.8	104.1	70.9	36.7	21.7	16.3	12.7	10.5	7.4	6.7	3.6
	W	2153.4	1381.9	1165.2	795.4	414.6	250.2	188.2	147.4	122.8	86.7	78.7	41.9
10.50V	A	195.1	110.7	91.1	66.3	35.5	21.2	15.9	12.5	10.4	7.3	6.6	3.6
	W	2130.1	1259.3	1039.2	763.0	411.0	245.8	184.8	146.0	121.9	86.4	77.7	42.3
10.80V	A	188.0	104.3	84.6	61.1	34.3	20.7	15.5	12.3	10.1	7.2	6.5	3.5
	W	2109.1	1203.1	974.9	707.9	399.5	242.1	182.4	145.1	119.9	84.7	77.3	41.8
11.10V	A	181.7	97.8	78.1	54.6	33.2	20.2	15.0	12.0	9.9	7.0	6.2	3.3
	W	2060.2	1132.1	909.4	638.8	389.8	238.2	177.6	142.4	117.9	83.3	74.5	40.2


Discharge characteristic Curve

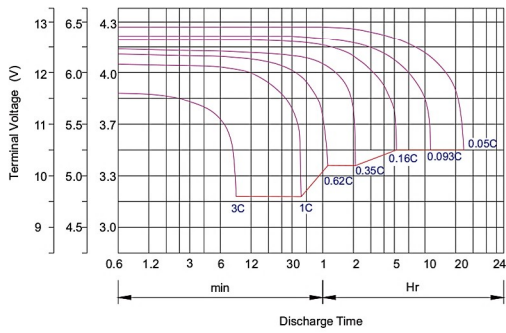


Cycle service life in relation to depth of discharge

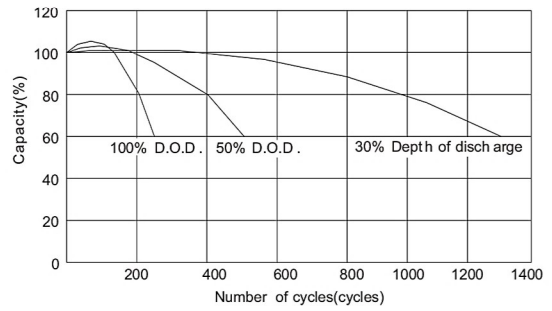


Relationship between charging voltage and temperature

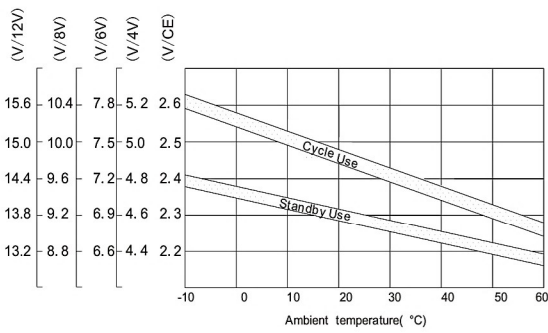


Constant voltage charging characteristic (0.25CA, at 25°C)

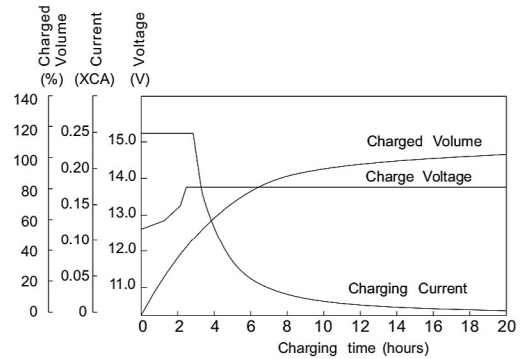


Life characteristics of standby use

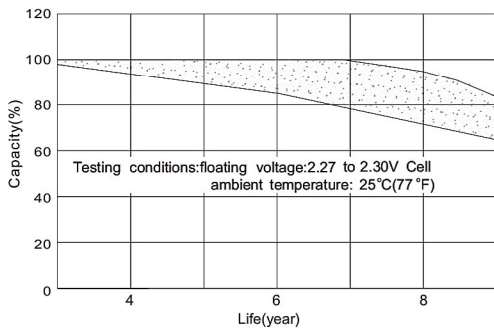

Self-discharge characteristic

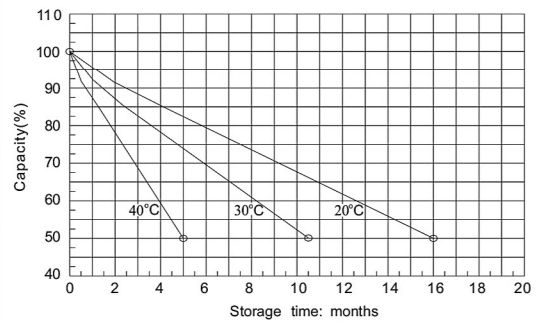

Temperature effects on float life

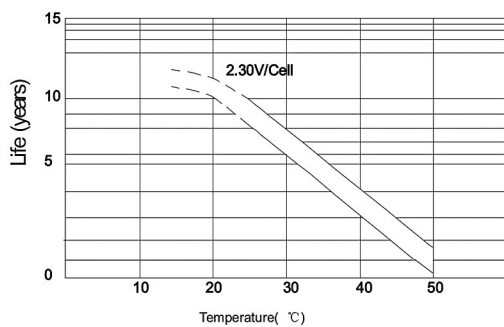

Charge characteristic Curve for standby use

